


PIFLUX:3	MAX STATIC PRESSURE (inch/H2O)	MAX CFM	HP	VOLTS	Hz	IMPELLER	INLET
	11.2	1624	3	220	60	Ø15.5"	Ø8"

PIFLUX:3	RESTRICTOR PLATE (inch)	DIA. 8"	DIA. 7"	DIA. 6"	DIA. 5"	DIA. 4"	DIA. 0"
	STATIC PRESSURE (inch/H2O)	2	2.65	4.3	7.2	9.7	11.2
	CFM	1624	1563	1439	1250	938	0
	VELOCITY	1.35	1.25	1.06	0.8	0.45	0

### PERFORMANCE CURVE

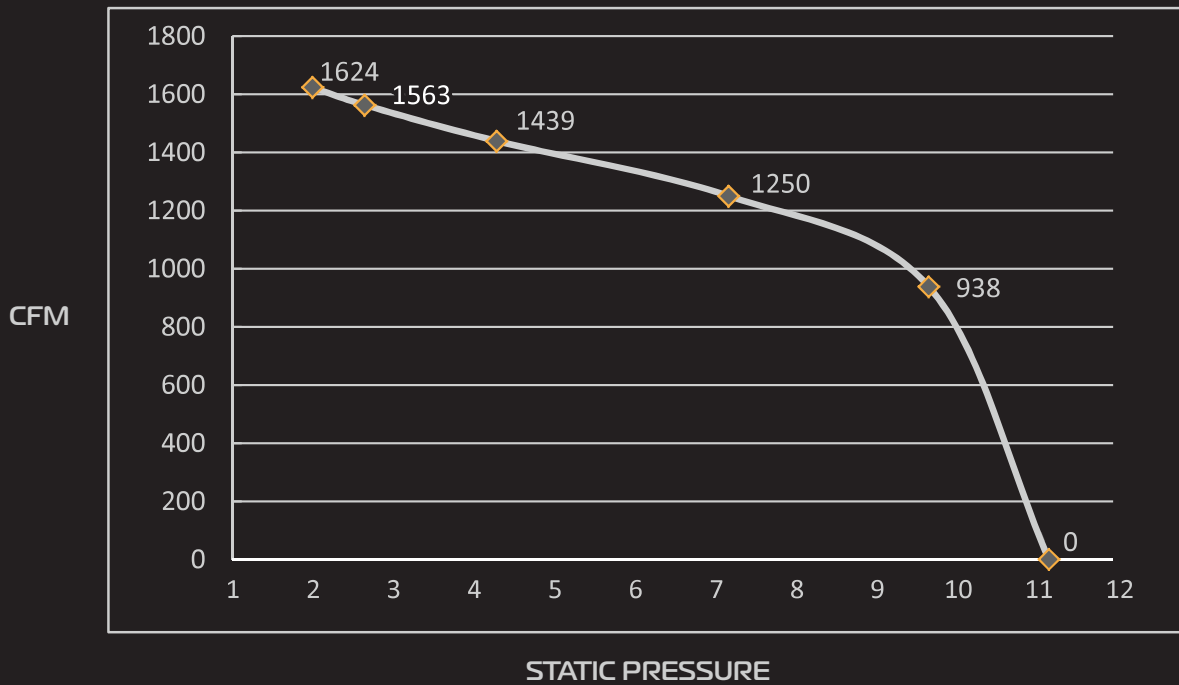

### \*HOW WE OBTAIN OUR READINGS

- Testing based on new, clean filter. Results will vary depending on use.
- The inlet on pflux:3 is 8"
- A flex hose 16 X longer than inlet diameter is attached 8 x 16 = 128"
- Air pressure meter measures the velocity & static pressure is inserted into this hose at halfway point = 64"
- The Air Pressure Meter measures in Inches of Water
- The CFM is measured with 8" opening at end of hose, no restrictions, 64" from inlet
- The Max. Static pressure is measured when the restrictor plate at end of hose is closed (0) 64" from inlet
- Air pressure meter measures the velocity and static pressure in inches of water
- CFM is calculated in the following manner:
- Square root of Velocity in inches of water x cross sectional area of cyclonic inlet in square feet x 4005
- Calculate cross sectional area of cyclonic inlet in square feet:  
 $8" / 12 = 0.66\text{ft}$     $0.66 / 2 = 0.33\text{ft}$     $0.33 \times 0.33 \times 3.1416 = 0.3491 \text{ft}^2$
- Formula:  $\sqrt{1.35 \text{ inch of water}} \times 0.349 \text{ft}^2 \times 4005 = 1624\text{CFM}$  (website states 1624CFM; this calculated value will slightly vary due to the rounded off values derived from the above formula)