

SUPERMAX 16-32

Scan For More Info



INTELLISAND



Shown with optional infeed-outfeed tables



EXCEPTIONAL SUPERMAX FEATURES

- ▢ Patented "Quick Lever Adjustment" allows height adjustments from 0-3" with one pull of a lever versus 48 revolutions of a hand wheel, greatly reducing set-up time and increases productivity.
- ▢ Includes built-in Digital Read Out which helps maintain consistent thicknesses to increase accuracy and quality.
- ▢ A newly designed Turbo Vented Dust Port increases CFM air-flow to dust collectors by 15%.
- ▢ Simple alignment feature – just one nut adjusts the conveyor to parallel the sanding head, making aligning the conveyor to the sanding head fast and easy.
- ▢ Indexed alignment setting – the fast lever is an indexed alignment setting for narrow and wide stock. When sanding stock wider than 16", the index lever will properly adjust the conveyor for flawless wide sanding.
- ▢ Drum will never go "out of alignment" – the drum carriage is bolted to the base, preventing any movement or alignment issues.
- ▢ INTELLISAND Technology: Automatically adjusts conveyor speed based on load.



DRO STANDARD EQUIPMENT



PATENTED "QUICK LEVER ADJUSTMENT"

SPECIFICATIONS

Drum Speed	1740 RPM
Maximum Sanding Width	32" (2 passes)
Minimum Sanding Length	2 1/4"
Maximum Sanding Thickness	3"
Minimum Sanding Thickness	1/32"
Drum	5" x 16" extruded aluminum
Dust hood	Turbo Vented - one 4" vacuum port (min. 600 CFM recommended)
Conveyor Speed	0-10 FPM
Drive Motor	1-1/2 HP
Power Requirements	110V, 15 Amp, 20 Amp Service
Shipping Weight	158 lbs (1 box including stand)
Assembled Dimensions (Footprint)	W: 34" D: 22" H: 48" (without casters)

Scan For More Info



SUPERMAX ACCESSORIES



SuperMax Expandable Roller Conveyor

The expandable roller stand assistive conveyor. Adjustable height and length make it ideal for any size workshop.

SUPMX-875600

SPECIFICATIONS

Maximum Load Capacity: 200lbs
Minimum Length: 14 3/4"
Maximum Length: 50"
Adjustable Height: 23" to 36"
Number of Rollers: 9 Nickel Plated
Rollers Dimensions (Dia x W): 1" 1/2" x 13" 3/4"
Swivel Casters: 4"x 3" W/Footbrake



SuperMax Casters

Create a convenient workspace by equipping your SuperMax machines with wheels! **SUPMX-98-0130**



SuperMax Folding Infeed Outfeed Tables

SuperMax infeed and outfeed tables help accommodate larger pieces of wood for sanding. **SUPMX-71632-7F**




SuperMax Abrasive Cleaning Stick

Use our abrasive cleaning stick to clean up your sandpaper and get it back in shape. **SUPMX-59120**



SuperMax Abrasive Wraps

Comes in 36, 60, 80, 100, 120, 150, 180, & 220 Grit Sand Paper.

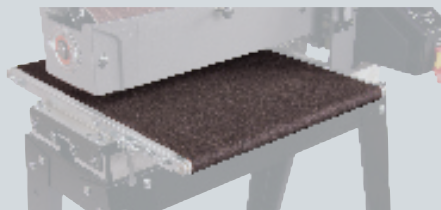

SuperMax Abrasive Conveyor Belts

For the 16-32, 19-38 & 25-50 SuperMax Drum Sander.